

ORNY 70

OPTIC 48G

Apparecchio illuminante da soffitto, 48Vdc, in tre dimensioni, con ottica spot, medium, flood, wide flood.
Ceiling-mounted luminaire, 48Vdc, in three sizes, with spot, medium, flood, wide flood optics.

III


IP65

CE

F

TECHNICAL DATA

Mounting	Ceiling		
Dimensions	G1 Ø 300 mm x H 166 mm G2 Ø 234 mm x H 248 mm G3 Ø 168 mm x H 327 mm		
Light source	COB LED technology		
Power supply	48 Vdc		
Power	7,1 W		
CRI	90 98		
Colour temperature	2700 K	3000 K	4000 K
Source flux CRI90	726 lm	760 lm	806 lm
Luminous flux CRI90	602 lm	630 lm	668 lm
Luminous efficacy	84,7 lm/W	88,7 lm/W	94 lm/W
Control	DALI on board		
Insulation class	III		

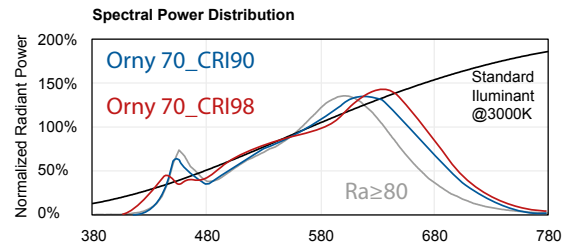

MATERIALS

Body	Aluminium through CNC machining
Finishing	Powder-coated, galvanic treatment
Screen	Extra clear tempered silk-screened glass
Decorative glass	Encased blown glass

FINISHING

 black	 light gold	 black nickel
 white	 rose gold	 titanium

DECORATIVE GLASS COLOUR


 white gradient	 smoked gradient	 dove grey gradient
--	--	--

LIGHT BEAMS


Light distribution

spot | medium | flood | wide flood


SPOT
beam 14°




MEDIUM
beam 24°



FLOOD
beam 40°



WIDE FLOOD
beam 54°



CODE COMPOSITION

OR70 C 7W 48 DALI	Decorative glass colour	A white gradient B smoked gradient C dove grey gradient
	Decorative glass	G1 G2 G3
	Finishing	BL black WH white GC light gold GR rose gold NB black nickel TI titanium
	Light beam	SP spot ME medium FL flood WF wide flood
	Colour temperature	27 2700K 30 3000K 40 4000K
	CRI	9 90 T 98

Example of code composition
OR70 C 7W 48 DALI 9 30 SP BL G1 A

Product

Orny 70

Optic 48G

G1



G2



G3

