

ORNY 70

P48

Apparecchio illuminante da soffitto, da parete, da pavimentazione 48Vdc, con ottica spot, medium, flood e wide flood. *Ceiling-mounted, wall and paving luminaire, 48Vdc, with spot, medium, flood and wide flood optics.*

III IP65 CE F

TECHNICAL DATA


Mounting	Projector		
Dimensions	Ø 68 mm x L 122 mm x H 94 mm		
Light source	COB LED technology		
Power supply	48 Vdc		
Power	7,1 W		
CRI	90 98		
Colour temperature	2700 K	3000 K	4000 K
Source flux CRI90	726 lm	760 lm	806 lm
Luminous flux CRI90	602 lm	630 lm	668 lm
Luminous efficacy	84,7 lm/W	88,7 lm/W	94 lm/W
Control	ON/OFF dimmable on request		
Insulation class	III		

MATERIALS

Body	Aluminium through CNC machining
Finishing	Powder-coated, galvanic treatment
Screen	Extra clear tempered silk-screened glass

FINISHING


 black	 light gold	 black nickel
 white	 rose gold	 titanium
 corten		

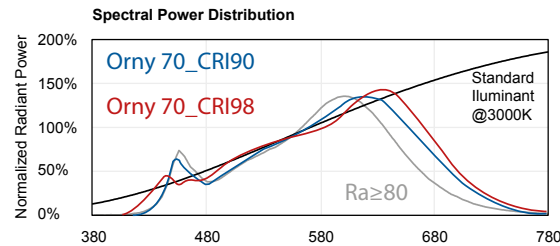


LIGHT BEAMS

Light distribution spot | medium | flood | wide flood


SPOT
beam 14°




MEDIUM
beam 24°



FLOOD
beam 40°



WIDE FLOOD
beam 54°



CODE COMPOSITION

OR70 P 7W 48 ON/OFF _ _ _ _ _

Finishing	BL black
	WH white
	CR corten
	GC light gold
	GR rose gold
	NB black nickel
	TI titanium
Light beam	SP spot
	ME medium
	FL flood
	WF wide flood
Colour temperature	27 2700K
	30 3000K
	40 4000K
CRI	9 90
	T 98

Example of code composition
OR70 P 7W 48 ON/OFF 9 30 SP BL

