

Orny 70

Diffuse 48G

Apparecchio illuminante da soffitto, 48Vdc, con emissione luminosa diffusa, disponibile in tre dimensioni.
Ceiling-mounted luminaire, 48Vdc, with diffused light emission, available in three sizes.


 IP65

 CE

 F

TECHNICAL DATA

Mounting	Ceiling		
Dimensions	G1 Ø 300 mm x H 166 mm G2 Ø 234 mm x H 248 mm G3 Ø 168 mm x H 327 mm		
Light source	SMD mid power LED technology		
Power supply	48 Vdc		
Power	5,8 W		
CRI	90		
Colour temperature	2700 K	3000 K	4000 K
Source flux	735 lm	756 lm	781 lm
Luminous flux	514 lm	529 lm	546 lm
Luminous efficacy	88,6 lm/W	91,2 lm/W	94,1 lm/W
Control	DALI on board		
Insulation class	III		

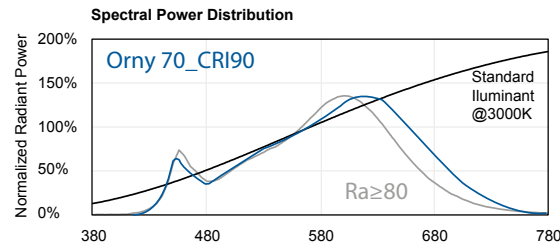

MATERIALS

Body	Aluminium through CNC machining
Finishing	Powder-coated, galvanic treatment
Screen	Opal PMMA
Decorative glass	Encased blown glass

FINISHING

 black	 light gold	 black nickel
 white	 rose gold	 titanium

DECORATIVE GLASS COLOUR


 white gradient	 smoked gradient	 dove grey gradient
--	--	--

LIGHT BEAMS

Light distribution

diffuse

DIFFUSE



CODE COMPOSITION

OR70 C 6W 48 DALI 9 __ DI __ __ _

		Decorative glass colour	A	white gradient
			B	smoked gradient
			C	dove grey gradient
		Decorative glass	G1	
			G2	
			G3	
		Finishing	BL	black
			WH	white
			GC	light gold
			GR	rose gold
			NB	black nickel
			TI	titanium
		Colour temperature	27	2700K
			30	3000K
			40	4000K

Example of code composition
OR70 C 6W 48 DALI 9 30 DI BL G1 A

G1



G2



G3

