

ORNY 70

OPTIC 230G

Apparecchio illuminante da soffitto, da sospensione, 230Vac, in tre dimensioni,con ottica spot, medium, flood e wide flood.
Ceiling-mounted, pendant luminaire, 230Vac, in three sizes, with spot, medium, flood and wide flood optics.


 IP65





TECHNICAL DATA

Mounting	Ceiling Suspension		
Dimensions	G1 Ø 300 mm x H 166 mm G2 Ø 234 mm x H 248 mm G3 Ø 168 mm x H 327 mm		
Light source	COB LED technology		
Power supply	220-240 Vac		
Power	7,8 W		
CRI	90 98		
Colour temperature	2700 K	3000 K	4000 K
Source flux CRI90	726 lm	760 lm	806 lm
Luminous flux CRI90	602 lm	630 lm	668 lm
Luminous efficacy	77,1 lm/W	80,7 lm/W	85,6 lm/W
Control	DALI on board		
Insulation class	I		

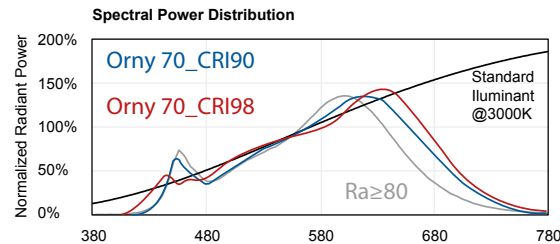

MATERIALS

Body	Aluminium through CNC machining
Finishing	Powder-coated, galvanic treatment
Screen	Extra clear tempered silk-screened glass
Decorative glass	Encased blown glass

FINISHING

 black	 light gold	 black nickel
 white	 rose gold	 titanium

DECORATIVE GLASS COLOUR

 white gradient	 smoked gradient	 dove grey gradient
--	--	--

NOTE


Suspension	Supplied complete with rosette, steel suspension cable L=2000 mm and power supply cable
------------	---

LIGHT BEAMS


Light distribution

spot | medium | flood | wide flood


SPOT
beam 14°




MEDIUM
beam 24°



FLOOD
beam 40°



WIDE FLOOD
beam 54°



CODE COMPOSITION

OR70 _ 8W 230 DALI _ _ _ _ _

	Decorative glass colour	A white gradient
	Decorative glass	B smoked gradient
		C dove grey gradient
	Finishing	G1
		G2
		G3
	Light beam	BL black
		WH white
		GC light gold
		GR rose gold
		NB black nickel
		TI titanium
		SP spot
		ME medium
		FL flood
		WF wide flood
	Colour temperature	27 2700K
		30 3000K
		40 4000K
	CRI	9 90
		T 98
	Mounting	C ceiling
		S suspension

Example of code composition
OR70 C 8W 230 DALI 9 30 SP BL G1 A

G1



G2



G3

