

ORNY 70

OPTIC R

Apparecchio illuminante da incasso soffitto, 350mA/500mA, con ottica spot, medium, flood e wide flood.  
*Recessed ceiling-mounted luminaire, 350mA/500mA, with spot, medium, flood and wide flood optics.*

III

IP65

CE


F

TECHNICAL DATA

|                  |                                                  |  |  |
|------------------|--------------------------------------------------|--|--|
| Mounting         | Ceiling recesed                                  |  |  |
| Dimensions       | Ø 79 mm x H 90 mm                                |  |  |
| Light source     | COB LED technology                               |  |  |
| CRI              | 90   98                                          |  |  |
| Control          | Constant current driver to be ordered separately |  |  |
| Insulation class | III                                              |  |  |

|                     |          |            |            |
|---------------------|----------|------------|------------|
| Power supply        | 350 mA   |            |            |
| Power               | 5,9 W    |            |            |
| Colour temperature  | 2700 K   | 3000 K     | 4000 K     |
| Source flux CRI90   | 726 lm   | 760 lm     | 806 lm     |
| Luminous flux CRI90 | 602 lm   | 630 lm     | 668 lm     |
| Luminous efficacy   | 102 lm/W | 106,7 lm/W | 113,2 lm/W |

|                     |          |         |          |
|---------------------|----------|---------|----------|
| Power supply        | 500 mA   |         |          |
| Power               | 8,7 W    |         |          |
| Colour temperature  | 2700 K   | 3000 K  | 4000 K   |
| Source flux CRI90   | 992 lm   | 1038 lm | 1101 lm  |
| Luminous flux CRI90 | 823 lm   | 861 lm  | 913 lm   |
| Luminous efficacy   | 94,5lm/W | 99 lm/W | 105 lm/W |

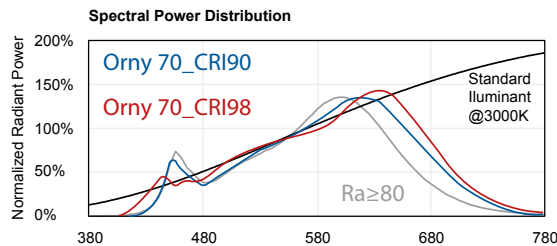

MATERIALS

|           |                                          |
|-----------|------------------------------------------|
| Body      | Aluminium through CNC machining          |
| Finishing | Powder-coated, galvanic treatment        |
| Screen    | Extra clear tempered silk-screened glass |

FINISHING

|                                                                                            |                                                                                                 |                                                                                                    |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  black  |  light gold |  black nickel |
|  white  |  rose gold  |  titanium     |
|  corten |  chrome     |                                                                                                    |

NOTE

Housing box  
cod. 1281 30 +  
cod. 1281 01 or  
cod. 1281 61


For installing in ceiling or walls in concrete or masonry it is necessary to use the housing box page 68 to be ordered separately

LIGHT BEAMS


Light distribution

spot | medium | flood | wide flood


**SPOT**  
beam 14°

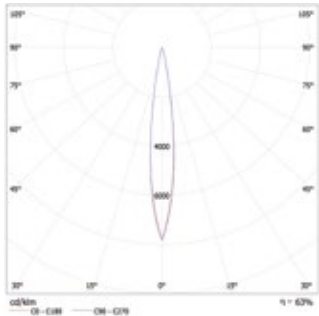


**MEDIUM**  
beam 24°

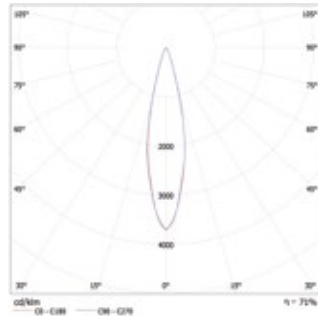

**FLOOD**  
beam 40°

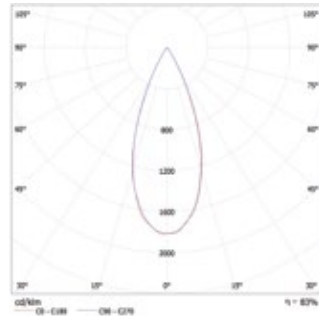


**WIDE FLOOD**  
beam 54°

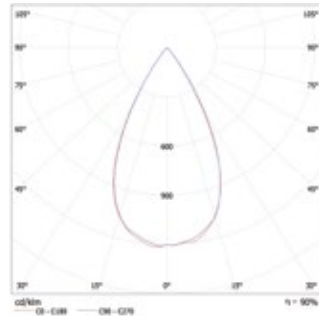

CODE COMPOSITION

OR70 RC \_\_\_\_ 08 \_ \_ \_ \_ \_

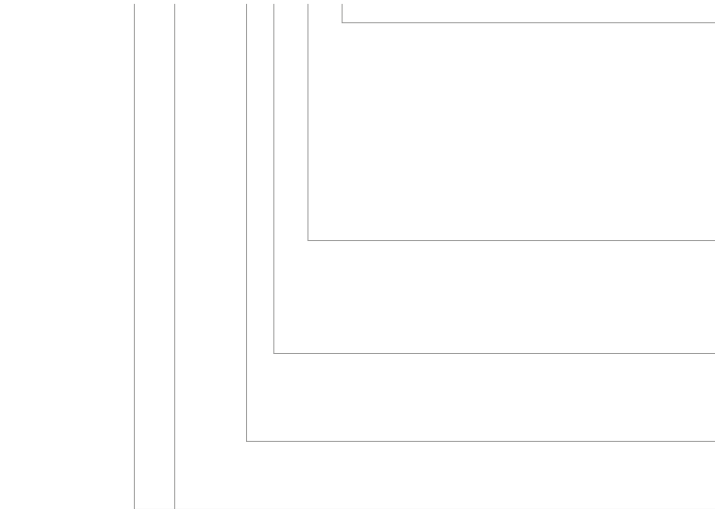

|                        |           |              |
|------------------------|-----------|--------------|
| Finishing              | <b>BL</b> | black        |
|                        | <b>WH</b> | white        |
|                        | <b>CR</b> | corten       |
|                        | <b>GC</b> | light gold   |
|                        | <b>GR</b> | rose gold    |
|                        | <b>CM</b> | chrome       |
|                        | <b>NB</b> | black nickel |
|                        | <b>TI</b> | titanium     |
| Light beam             | <b>SP</b> | spot         |
|                        | <b>ME</b> | medium       |
|                        | <b>FL</b> | flood        |
|                        | <b>WF</b> | wide flood   |
| Colour temperature     | <b>27</b> | 2700K        |
|                        | <b>30</b> | 3000K        |
|                        | <b>40</b> | 4000K        |
| CRI                    | <b>9</b>  | 90           |
|                        | <b>T</b>  | 98           |
| Power and Power supply | <b>6W</b> | <b>350</b>   |
|                        | <b>9W</b> | <b>500</b>   |

Example of code composition  
OR70 RC 6W 350 08 9 30 SP BL

